


过渡接头 ADAPTER

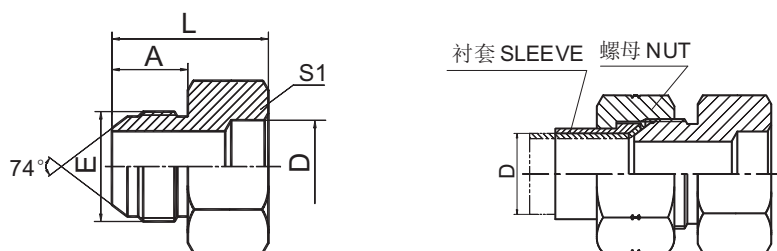

5JW-IN

JIC 外螺纹 74° 外锥 / 英寸制焊接管
 JIC MALE 74° CONE/INCH SOCKET-WELD TUBE

代号 PART NO.	螺纹 THREAD		焊接管外径 D	尺寸 DIMENSIONS			
	E		WELD TUBE O.D D	A	L	S1	
5JW-04IN	7/16"X20		1/4"	14	23	14	
5JW-04-05IN	7/16"X20		5/16"	14	23	14	
5JW-05IN	1/2"X20		5/16"	14	23	14	
5JW-06IN	9/16"X18		3/8"	14.1	24	17	
5JW-08IN	3/4"X16		1/2"	16.7	29.5	22	
5JW-08-06IN	3/4"X16		3/8"	16.7	29.5	22	
5JW-08-10IN	3/4"X16		5/8"	16.7	29.5	24	
5JW-08-12IN	3/4"X16		3/4"	16.7	29.5	24	
5JW-10IN	7/8"X14		5/8"	19.3	32	24	
5JW-10-08IN	7/8"X14		1/2"	19.3	32	24	
5JW-10-12IN	7/8"X14		3/4"	19.3	35	30	
5JW-12IN	1.1/16"X12		3/4"	22	38	30	
5JW-12-08IN	1.1/16"X12		1/2"	22	37	30	
5JW-12-10IN	1.1/16"X12		5/8"	22	37	30	
5JW-12-16IN	1.1/16"X12		1"	22	39	36	
5JW-14IN	1.3/16"X12		7/8"	22.6	39.5	36	
5JW-16IN	1.5/16"X12		1"	23	40	36	
5JW-16-20IN	1.5/16"X12		1.1/4"	23	41	41	
5JW-20IN	1.5/8"X12		1.1/4"	24.3	43	46	
5JW-20-16IN	1.5/8"X12		1"	24.3	43	46	
5JW-20-24IN	1.5/8"X12		1.1/2"	24.3	45.5	50	
5JW-24IN	1.7/8"X12		1.1/2"	27.5	48.5	50	
5JW-24-20IN	1.7/8"X12		1.1/4"	27.5	48.5	50	
5JW-32IN	2.1/2"X12		2"	33.9	55	65	

注：螺母及衬套需另行订货。管子直径 D 为公制时，配用螺母及衬套分别选用 NB200、NB500。管子直径为英制时，配用螺母及衬套分别选用 NB200、NB300。 Nut and sleeve should be ordered separately. The nut NB200 and sleeve NB500 is suitable for metric tube, the nut NB200 and sleeve NB300 is suitable for inch tube.